## **Uni-Form Features**

Uni-Form is today's superior form.

The reinforced, high-carbon steel frame means edges stay straight and corners stay square, so panels are quickly aligned and easily stacked. Built-in handles make moving and placing the panels easy, too.

The long-lasting plywood facing have a heavy-duty overlay and aluminum-filled polyurethane edge sealer to keep out moisture and prevent delamination and swelling. When needed, refacing is simple and inexpensive.

All these factors combine to create a 1,000 psf rated system that will save you time in setup, last longer and give you better results.

## **Panels and Fillers**


There are 80 sizes available for fast erection of virtually any layout by combining panel and filler sizes and erecting vertically or horizontally. This eliminates the sawing, drilling, measuring and nailing common with job-built forming. Quick and easy handling, no tops, bottoms, lefts or rights makes for improved labor productivity.


Uni-Form owners commonly report 200 to 300 reuses from panels and filler before re-ply is necessary.

Special <sup>1</sup>/<sub>2</sub>" HDO Plywood is edge-and surface-sealed to prevent determination and to prolong form life.

Durable, high carbon steel frames are reinforced for rigidity and strength to surround and protect the plywood.

No measuring or drilling for ties-dado slots are placed 12" on center and 6" from each end for tie insertion.

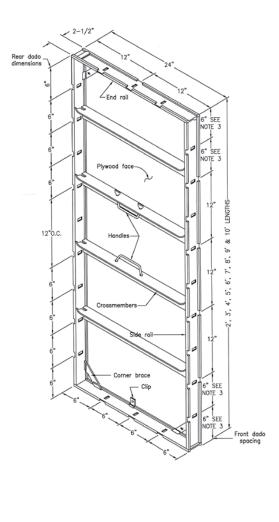



## universal